TEST AND GARAGE EQUIPMENT




Wireless measuring heads equipped with 2.4 GHz radio technology







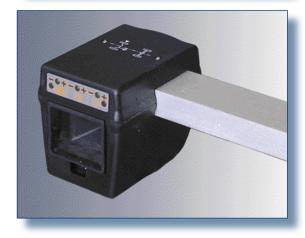



🤐 Main features

Computerised wheel aligner with 8x4 wireless CCD sensors.

Multilanguage Windows 10 IoT O/S.

Wheeled main unit equipped with LCD monitor (available as optional in a wide range of accessories) and with protected compartment for PC and printer. "SIM card" tecnology (HARD LOCK device) for special programs and software upgrade.

Built-in chargers in the measuring heads, with battery in chargeposition while hanged on the cabinet and during the emergency cables use (supplied as standard).

Control panel shows the measuring head charge condition. Quick control keyboard on the panel of measuring head

LEDs to show the angle tolerances ("traffic lights") positioned at the end of each sensor arm, so visible once adjustment are performed from the pit or under the lifts.

CCD cameras with measuring range: ±25°.



COMPATIBLE WITH




The wheel aligner is compatible with the new PROADAS universal system used for the calibration of driver assistance systems on new generation vehicles.

Using the wheel aligner sensors mounted on the PROADAS system, the system for calibrating the camera and radar on board the vehicle can be aligned precisely and quickly.

Manufacturers recommend calibrating ADAS systems after aligning the

For more information visit the PROADAS product section on our website.

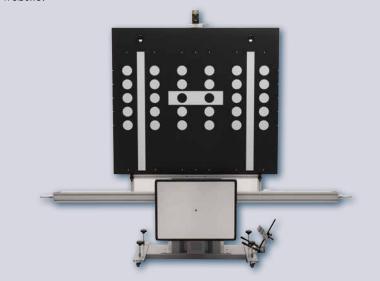


Functional features

Animations (optional): adjustment procedures run with a step-by-step sequence, supported by animated video pages. Angle adjustment displayed in comprehensive coloured fields. Toe curve adjustment. Special dedicated procedures for VW, Mercedes, trucks and heavy duty (optional).

Push-mode ROC with wheels lifted or for one wheel. Databank: **about 40,000 vehicles** to cover every market-area worldwide.





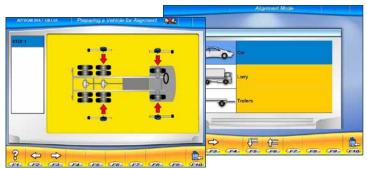

2.4 GHz industrial wireless remote control (on request).



C400 INEXT - LORRY-BUS VERSION

The best choice for wheel alignment professionals of light & heavy duty vehicles too!

The traditional CCD camera aligner for light vehicles, with flexible TTP HPA-FAIP SW (optional), also dedicated to **trucks** & **bus** thanks to the wide range of specific optional accessories.






Equipment for comprehensive car and van alignment



Technical Data	
Measuring ranges:	
- Total toe	± 48°
- Partial toe	± 24°
- Camber	± 10°
- Caster	± 30°
- King pin angle - Set back	± 30°
- Set back	± 24°
- Thrust angle	± 24°
- Thrust angle Power supply voltage	230 Vac/50-60 Hz/1 Ph
Absorbed power	500 W
Radio measuring heads batteries	1.2 V AA - 3000 mA (6xgr.)

Supplied accessories	Optional accessories
□ DVD ROM with back-up program	☐ LCD Monitor
☐ Set of 4 emergency cables	☐ A4 colour inkjet printer set
☐ Steering wheel holder	■ AVP - AAP - MBP - TTP procedure kits
☐ Pedal depressor	☐ Pair of 4-point clamps
 Operator's instruction manual 	



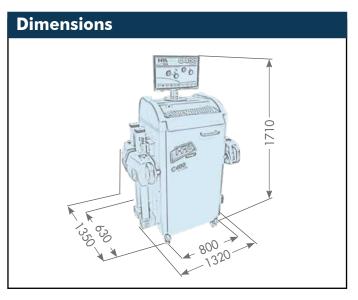

The illustrations, configurations and technical features in this pubblication are intended to present the product only, and are subject to variation. To ensure correct ordering, always refer to the current price list.







