SUPERLIFT 55/XC SUPERLIFT 45/XC

Electrohydraulic underwheel scissors type lift









Electrohydraulic underwheel scissors type lift for total wheel alignment "CT" with:

- rear oscillating platforms and recesses for front turntables.
- auxiliary wheel release lift "LT".

Versions available:

Superlift 55/XC CT LT - Superlift 55/XC CT - Superlift 55/XC Superlift 45/XC CT LT - Superlift 45/XC CT - Superlift 45/XC



1. Lift table with double lifting cylinder to ensure a constant parallel lift movement.




2. Control unit with few essential keys and clear and intuitive functional icons.



3. The wheel alignment versions of the range already include the possibility of adjust the base frame.



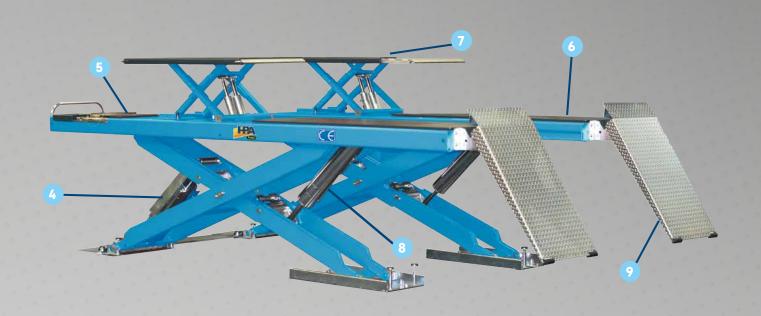


- **4. Adjustable mechanical safety device**, also for exact adjustment for wheel alignment.
- Adjustable recess for the turntable.
- **6. Sliding plates** with air central locking.







- 7. Lift table with double lifting cylinder and double extensions, in front and rear, which is very flexible, no movement of vehicle on the lift needed.
- **8. Double lifting lever** to ensure a constant parallel lift movement.
- Easy drive on with short and sturdy ramps due to very low height.








TECHNICAL DATA

	55/XC	45/XC
Main lift capacity	5500 kg	4500 kg
"LT" capacity	4000 kg	4000 kg
Lifting time	45 s	45 s
Motor	400/230V - 3kW - 3ph - 50 /60 Hz	400/230V - 3kW - 3ph - 50 /60 Hz
Main lift max. lifting height	2010 / 2030 / 2090 mm	2010 / 2030 / 2090 mm
"LT" max. lifting height	411 mm	411 mm
Lift minimum height	165 / 185 / 240 mm	165 / 185 / 240 mm
Runboard length	4608 / 5208 mm	4208 mm

SUPPLIED ACCESSORIES

- Automatic runway levelling system with master/ slave hydraulic circuit.
- Self-lubricating bushings on all rotating parts.
- Set of 4 rubber pads.
- Pair of cross pieces and pads for off-road vehicles.
- Kit for flush installations.

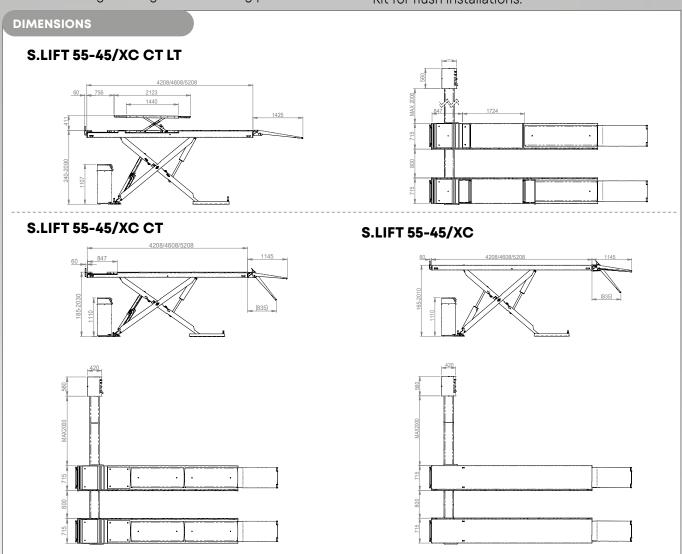

The manufacturer reserves the right to modify the features of its products at any time.





NEXION S.p.A. www.hpa-faip.it - info@hpa-faip.it

