

SUPERLIFT 40-2STC E

SUPERLIFT 36-2STC E

Electrohydraulic underbody scissors type lift, for tyre specialists, car workshops, and body repairers






SUPERLIFT 40-2STC E - SUPERLIFT 36-2STC E

Electrohydraulic underbody scissors type lift, for tyre specialists, car workshops, and body repairers.

Runboards alignment by **MASTER/SLAVE system**.

Runboard available with extensions only. **Configuration for flush installation.**



Runway with **pull-out extension**.



Generously sized, self-lubricating sliding blocks.



Special **lift linkage**, for lifting loads even from the lowest lift height.



Strong support of cylinder and **removable connections** on base and runway for simpler maintenance.

TECHNICAL DATA

	40-2STC E	36-2STC E
Lift capacity	4000 kg	3600 kg
Lifting time	45 s	45 s
Motor	400/230V-3kW-3ph-50 Hz	400/230V-3kW-3ph-50 Hz
Lift max. lifting height	2020 mm	2020 mm
Lift minimum height	290 mm	270 mm

SUPPLIED ACCESSORIES


- Self-lubricating bushings on all rotating parts
- Set of 4 rubber pads

OPTIONAL


- Pair of cross pieces and pads for off-road vehicles.
- Kit for pit installations.

DIMENSIONS

SUPERLIFT 40-2STC E

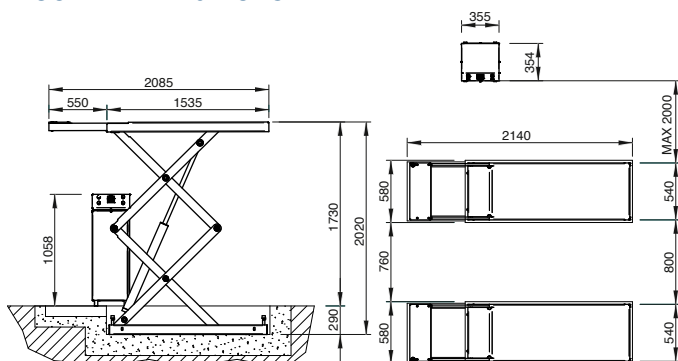

SUPERLIFT 36-2STC E

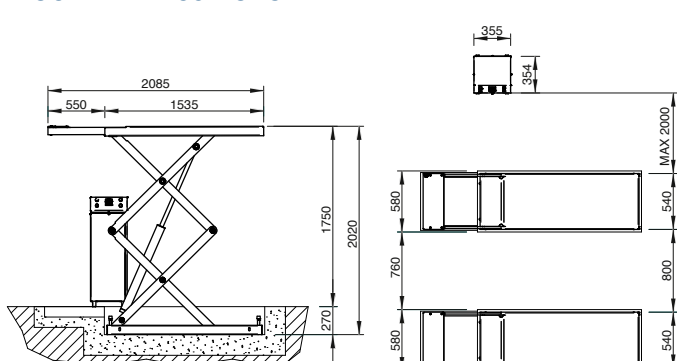

The manufacturer reserves the right to modify the features of its products at any time.



NEXION S.p.A.
www.hpa-faip.it - info@hpa-faip.it

Designed in
ITALY